

Cover with spacer bushes and cylinder screws


Edmayr Antriebstechnik GmbH

Thalham 20, 4880 St. Georgen im Attergau

Tel.: +43 7667 6840 Fax: +43 7667 20070

office@edmayr.at

www.edmayr.at

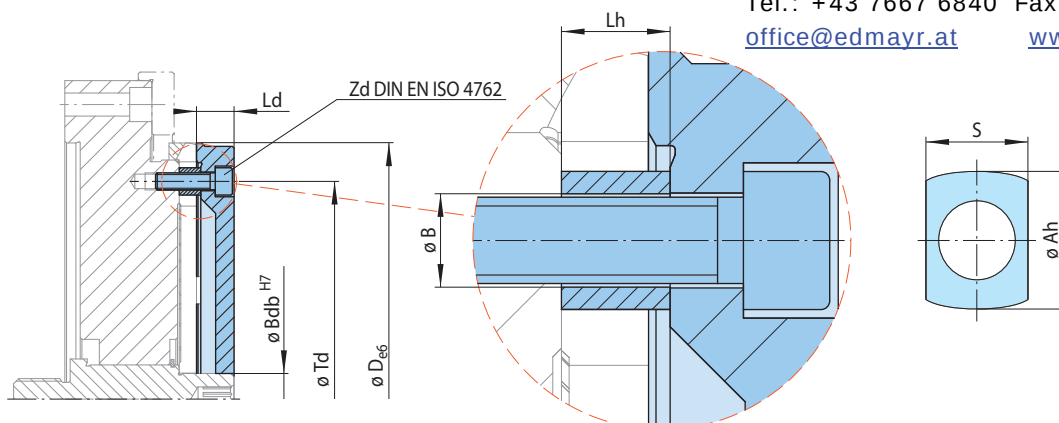


72-1

for size	Ah mm	B mm	Bdb mm	D mm	Ld mm	Lh* mm	S mm	Td mm	Y*	Zd	Art.-No. 3127-
KFDF 110	10	5,2	16	120 - 130	13	7,1	6,5	95	3	M 5	110900
KFDF 120	10	5,2	16	130 - 145	13	7,1	6,5	104	3	M 5	120900
KFDF 130	10	5,2	20	145 - 155	15	8,1	6,5	113	4	M 5	130900
KFDF 140	10	5,2	20	155 - 170	15	8,1	6,5	123	4	M 5	140900
KFDF 155	10	5,2	20	170 - 185	17	8,1	6,5	138	4	M 5	155900
KFDF 170	10	6,2	20	185 - 200	17	8,2	7,5	151	4	M 6	170900
KFDF 185	12	6,2	20	200 - 220	17	8,7	8,5	164	4	M 6	185900
KFDF 200	12	6,2	30	220 - 240	20	10,7	8,5	179	4	M 6	200900
KFDF 220	12	6,2	30	240 - 260	20	10,7	8,5	200	4	M 6	220900
KFDF 240	14	8,2	30	260 - 280	20	10,7	10,5	216	4	M 8	240900
KFDF 260	14	8,2	30	280 - 300	20	10,7	10,5	236	4	M 8	260900
KFDF 280	16	10,2	30	300 - 325	22	13,2	-	255	6	M 10	280900

*Y = Number of spacer bushes on pitch circle diameter Td

Assembly group for hand clamping (optional)

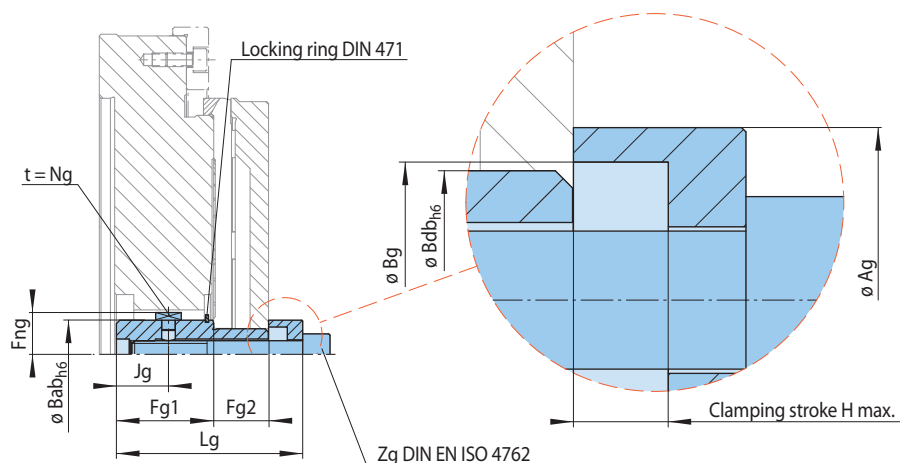

72-2

for size	Ag mm	Bab mm	Bdb mm	Bg mm	Fg1 mm	Fg2 mm	Fng mm	H max.* mm	Jg mm	Lg mm	Ng mm	Zg	Art.-No. 3145-
KFDF 110	22	22	16	17	32,5	17,5	13,3	3,4	17,5	58,6	5	M 10	022900
KFDF 120	22	22	16	17	32,5	17,5	13,3	3,8	17,5	58,6	5	M 10	022900
KFDF 130	32	28	20	22	41,0	23,0	18,5	4,0	23,0	73,1	8	M 12	028900
KFDF 140	32	28	20	22	41,0	23,0	18,5	4,5	23,0	73,1	8	M 12	028900
KFDF 155	32	28	20	22	41,0	23,0	18,5	5,1	23,0	75,1	8	M 12	028900
KFDF 170	32	28	20	22	41,0	23,0	18,5	5,8	23,0	75,1	8	M 12	028900
KFDF 185	32	28	20	22	41,0	23,0	18,5	6,4	23,0	75,1	8	M 12	028900
KFDF 200	40	40	30	32	57,0	32,0	24,5	6,7	30,5	105,1	8	M 16	040900
KFDF 220	40	40	30	32	57,0	32,0	24,5	7,8	30,5	105,1	8	M 16	040900
KFDF 240	40	40	30	32	57,0	32,0	24,5	8,5	30,5	105,1	8	M 16	040900
KFDF 260	40	40	30	32	57,0	32,0	24,5	9,4	30,5	105,1	8	M 16	040900
KFDF 280	40	40	30	32	57,0	32,0	24,5	10,2	30,5	109,1	8	M 16	040900

*Clamping stroke H max. describes the load limit of the Clamping Element while activation without component.