


Backstop ring with cylinder screws (optional)

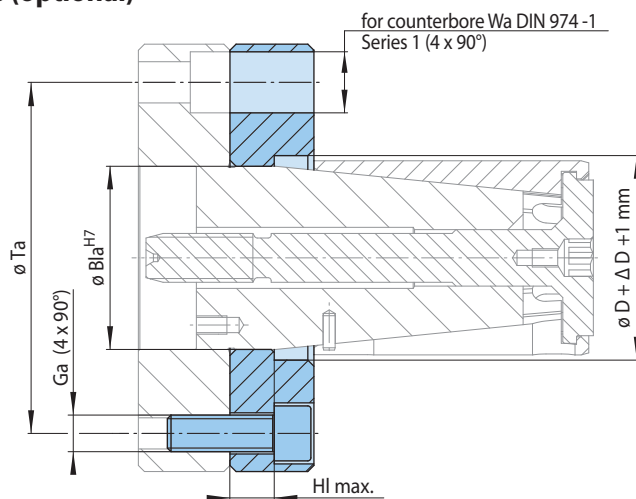

$\varnothing D$ = Clamping diameter
 ΔD = Maximum diameter change of the clamping
diameter of the Clamping Element

60-1

for size	Bl a mm	D mm	ΔD mm	Ga	HI max. mm	Ta mm	Wa
BKDF 6	11	11,90 - 15,00	0,6	M 8	4,0	50	8
BKDF 7	14	14,70 - 20,90	1,2	M 8	4,0	50	8
BKDF 12	20	20,70 - 27,90	1,2	M 8	8,5	50	8
BKDF 18	26	27,70 - 32,80	1,2	M 8	7,5	50	8
BKDF 19	30	32,60 - 42,80	1,2	M 8	9,0	70	8
BKDF 27	39	42,60 - 51,80	1,2	M 8	9,0	70	8
BKDF 32	49	51,60 - 64,00	2,4	M 10	13,5	95	10
BKDF 43	60	63,60 - 72,00	2,4	M 12	13,5	115	12
BKDF 44	66	71,60 - 82,00	2,4	M 12	13,5	115	12
BKDF 54	77	81,60 - 132,00	2,4	M 12	13,5	115	12

Missing dimensions reflect component geometry.

