


Seating body with backstop pins

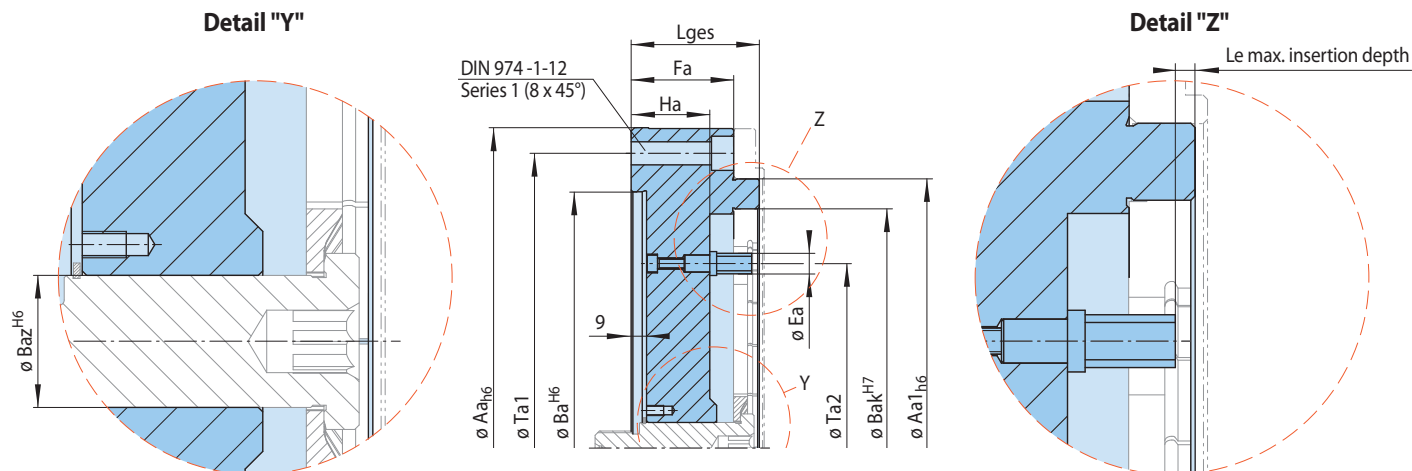


35-1

for size	Aa mm	Aa1 mm	Ba mm	Bak mm	Baz mm	Ea mm	Fa mm	Ha mm	Le max. mm	Lges mm	Ta1 mm	Ta2 mm	Art.-No.* 3173-
KFFF 110	200	150	125	110	16	5,5	34,5	29,3	5	45,5	175	80,5	110900
KFFF 120	200	150	125	120	16	10	34,5	28,9	5	45,5	175	85,5	120900
KFFF 130	225	170	125	130	16	10	34,5	28,5	5	45,5	200	95,0	130900
KFFF 140	225	170	125	140	16	10	34,5	28,1	5	45,5	200	104	140900
KFFF 155	250	200	175	155	20	10	42,5	33,7	6	55,5	225	114	155900
KFFF 170	250	200	175	170	20	10	42,5	33,1	6	55,5	225	124	170900
KFFF 185	275	225	200	185	20	10	42,5	32,4	6	55,5	250	139	185900
KFFF 200	275	225	200	200	20	10	42,5	31,8	6	55,5	250	153	200900
KFFF 220	315	250	240	220	20	12	42,5	31,3	6	55,5	280	165	220900
KFFF 240	375	315	300	240	30	12	60,0	48,0	6	75,0	345	180	240900
KFFF 260	375	315	300	260	30	12	60,0	47,0	6	75,0	345	200	260900
KFFF 280	375	315	300	280	30	14	60,0	46,0	6	75,0	345	216	280900

* Please indicate the insertion depth in your order.

Draw bolt with locking ring

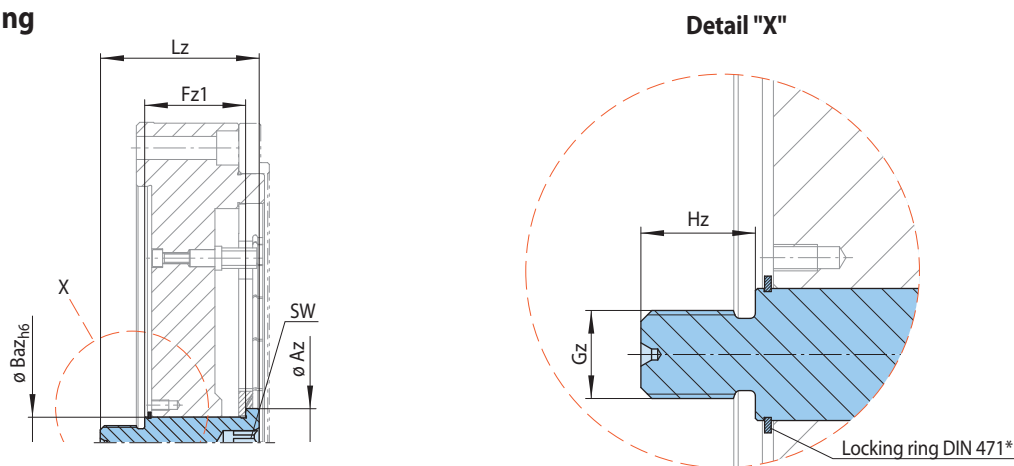

35-2

for size	Az mm	Baz mm	Fz1 mm	Gz	Hz mm	Lz mm	SW mm	Art.-No. 3186-
KFFF 110	22	16	32	M 12	18	56	8	022900
KFFF 120	22	16	32	M 12	18	56	8	022900
KFFF 130	22	16	32	M 12	18	56	8	022900
KFFF 140	22	16	32	M 12	18	56	8	022900
KFFF 155	28	20	40	M 16	22	69	10	028900
KFFF 170	28	20	40	M 16	22	69	10	028900
KFFF 185	28	20	40	M 16	22	69	10	028900
KFFF 200	28	20	40	M 16	22	69	10	028900
KFFF 220	28	20	40	M 16	22	69	10	028900
KFFF 240	40	30	59	M 20	26	93	14	040900
KFFF 260	40	30	59	M 20	26	93	14	040900
KFFF 280	40	30	59	M 20	26	93	14	040900

* The locking ring prevents loss of the draw bolt during transport and storage of the Clamping Fixture. It must be removed prior to installation and commissioning.