

# Brake Caliper DU 060 PFM

pneumatically activated – spring released

**EDMAYR**  
ANTRIEBSTECHNIK



## Features

|                                                                                               |            |
|-----------------------------------------------------------------------------------------------|------------|
| Brake Caliper                                                                                 | D          |
| Mounting to the machine, can be made either parallel or at the right angles to the brake disc | U          |
| Frame size 060                                                                                | 060        |
| Pneumatically activated                                                                       | P          |
| Spring released                                                                               | F          |
| Manual adjustment to accommodate friction block wear                                          | M          |
| Thrusters 660 or 680 are available                                                            | 660<br>680 |
| Thruster mounted right or left available                                                      | R<br>L     |
| Thickness of brake disc 25 mm or 40 mm                                                        | 25<br>40   |


## Example for ordering

Brake Caliper DU 060 PFM, thruster 680, thruster mounted right, thickness of brake disc 25 mm:

DU 060 PFM - 680 R - 25

## Technical Data

### Brake Caliper DU 060 PFM - 660

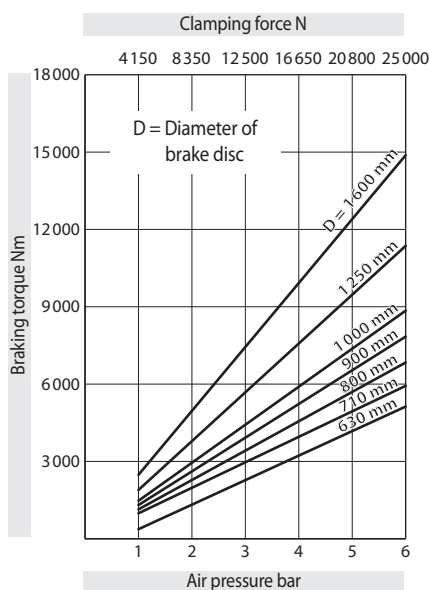


The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Air pressure: max. 6 bar

Air volume: max. 450 cm<sup>3</sup>  
per activation

Weight: 54 kg

### Brake Caliper DU 060 PFM - 680

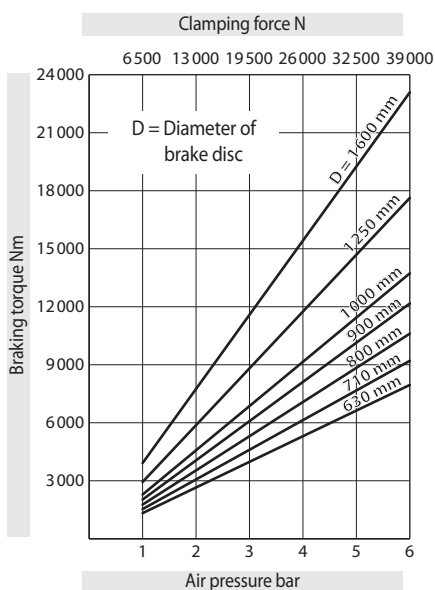

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Air pressure: max. 6 bar

Air volume: max. 2000 cm<sup>3</sup>  
per activation

Weight: 56 kg

**Edmayr Antriebstechnik GmbH**

Thalham 20, 4880 St. Georgen im Attergau


Tel.: +43 7667 6840 Fax: +43 7667 20070

[office@edmayr.at](mailto:office@edmayr.at)

[www.edmayr.at](http://www.edmayr.at)

# Brake Caliper DU 060 PFM

pneumatically activated – spring released

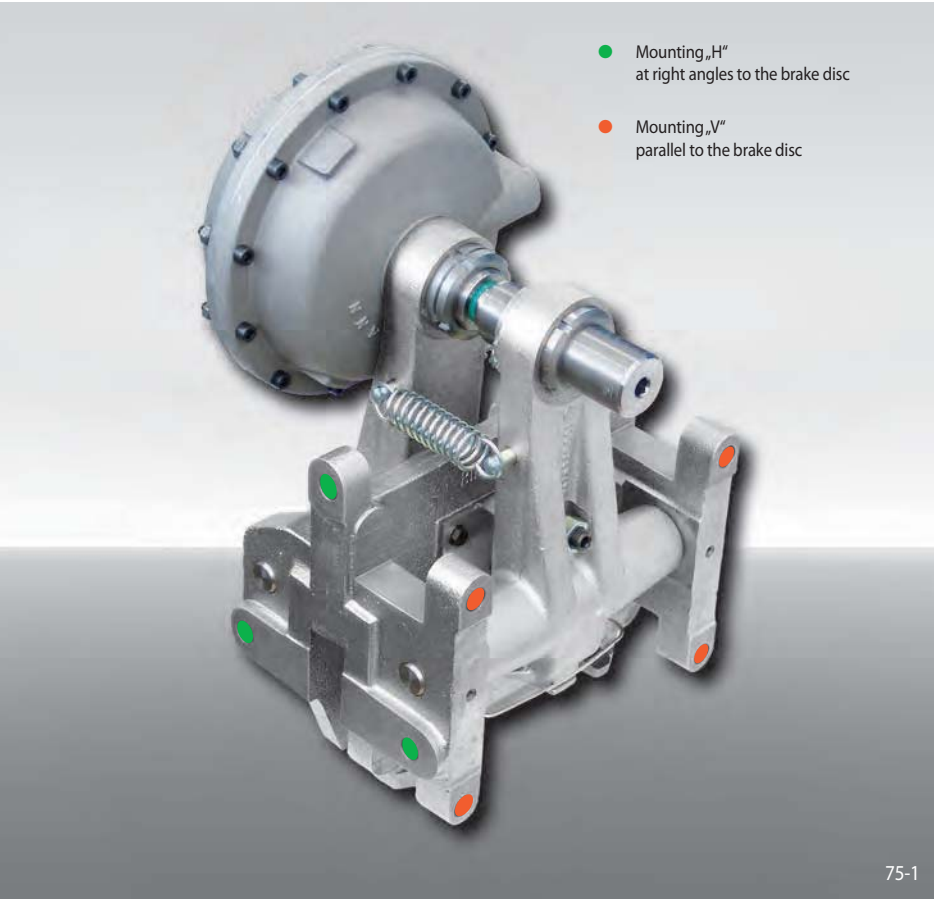

## Frame Design

