

spring activated – hydraulically released

EDMAYR
ANTRIEBSTECHNIK




Code

Brake Caliper	D
Mounting to the machine parallel to the brake disc	V
Frame size 035	035
Spring activated	F
Hydraulically released	H
Automatic adjustment to accommodate friction block wear	A
Thruster 260	260
Thruster mounted right or left available	R L
Thickness of brake disc 12,5 mm or 25 mm	12 25

Brake Caliper DV 035 FHA, thruster 260,
thruster mounted right, thickness of
brake disc 12,5 mm:

DV 035 FHA - 260 R - 12

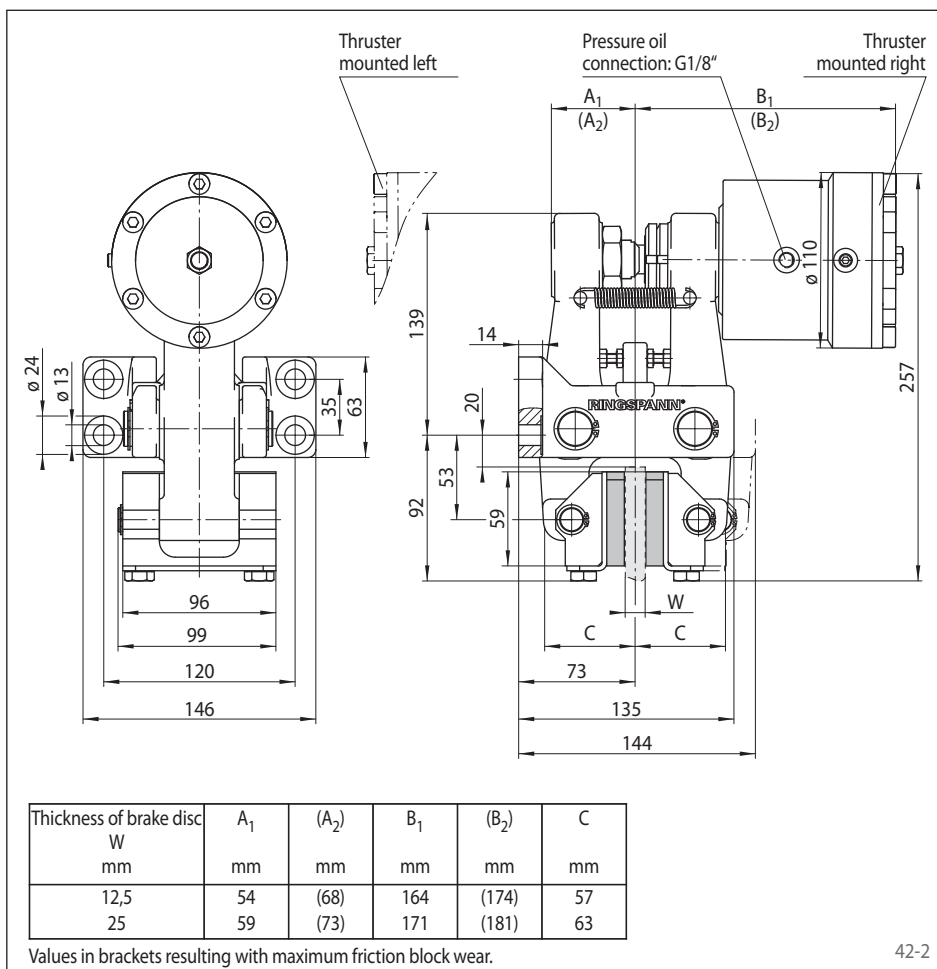

	Brake Caliper DV 035 FHA with thruster 260
Brake disc diameter	Braking torque
mm	Nm
300	1 500
355	1 850
430	2 350
520	3 000
630	3 600
710	4 100
800	4 700
Clamping force	16 000 N
Oil pressure	min. 55 bar max. 120 bar
Oil volume	max. 6 cm ³
Weight	13,9 kg

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

Edmayr Antriebstechnik GmbH
 Thalham 20, 4880 St. Georgen im Attergau
 Tel.: +43 7667 6840 Fax: +43 7667 20070
office@edmayr.at www.edmayr.at